


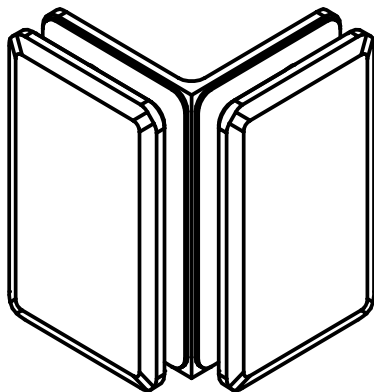


FRONT VIEW

Glass Clamps

Code NO. **GBR55G**

Glass to Glass Bracket

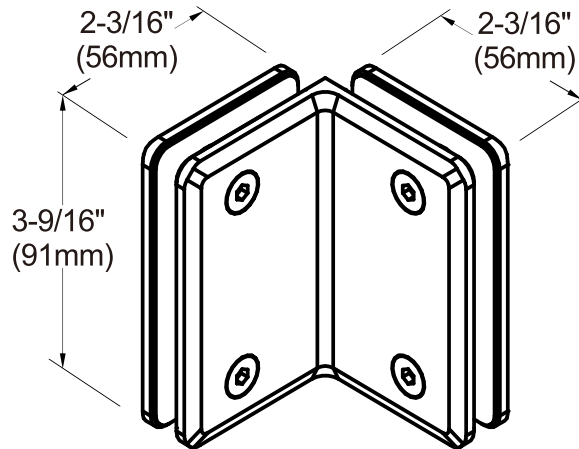

REAR VIEW

SPECIFICATIONS

Material: Solid brass

Glass Thickness Range: 3/8"(10mm) to 1/2"(12mm)


Hole Size Required: 3/4"(19mm)

Includes: Mounting screws and gaskets




www.sg-storeline.com

**SUN
DESIGN
GROUP**


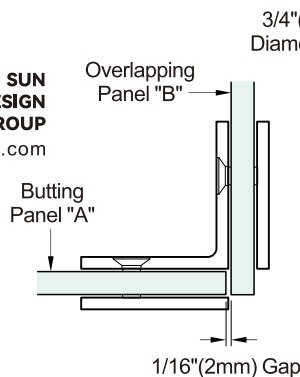


TYPICAL INSTALLATION

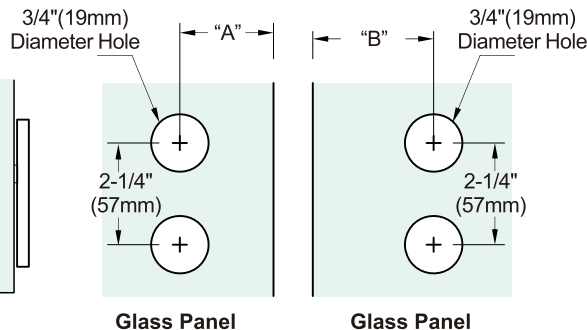

Glass Thickness	"A" Measurement	"B" Measurement
3/8"(10mm)	1-3/8"(35mm)	1-13/16"(46mm)
1/2"(12mm)	1-3/8"(35mm)	1-15/16"(49mm)

TEMPLATE OPTION 45° MITERED GLASS TYPICAL INSTALLATION

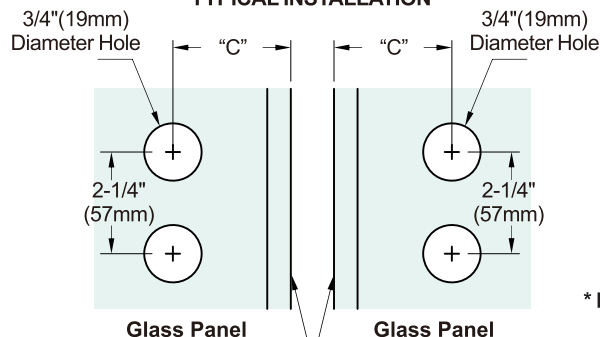

Glass Thickness	"C" Measurement
3/8"(10mm)	1-3/4"(44mm)
1/2"(12mm)	1-7/8"(47mm)

*** From the Outside Edge of Miter**

Glass Clamps

Code NO. **GBR55G**

Glass to Glass Bracket

Email: info@sg-storeline.com
www.sg-storeline.com

