



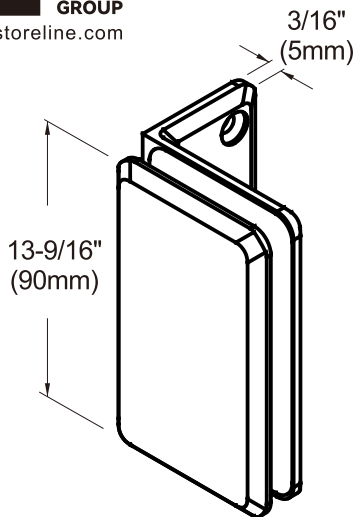

FRONT VIEW

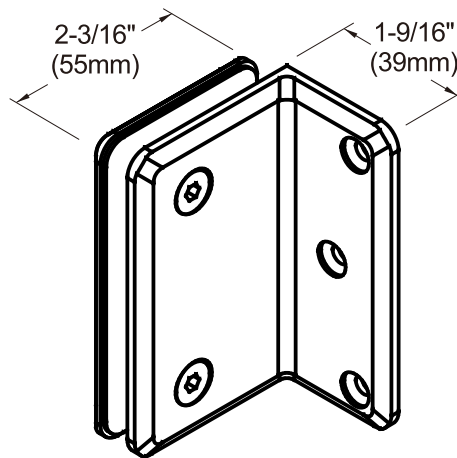

REAR VIEW

Glass Clamps

Code NO. **GBR55WS**

Beveled Wall Mount Bracket

SPECIFICATIONS

Material: Solid brass


Glass Thickness Range: 5/16"(8mm) to 1/2"(12mm)

Hole Size Required: .4"(19mm)


Includes: Mounting screws and gaskets



www.sg-storeline.com





TYPICAL INSTALLATION

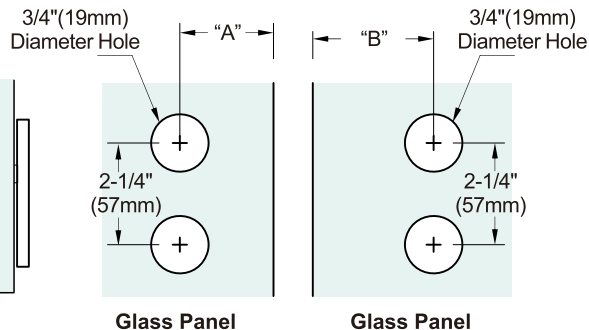

Glass Thickness	"A" Measurement	"B" Measurement
3/8"(10mm)	1-3/8"(35mm)	1-13/16"(46mm)
1/2"(12mm)	1-3/8"(35mm)	1-15/16"(49mm)

TEMPLATE OPTION 45° MITERED GLASS TYPICAL INSTALLATION

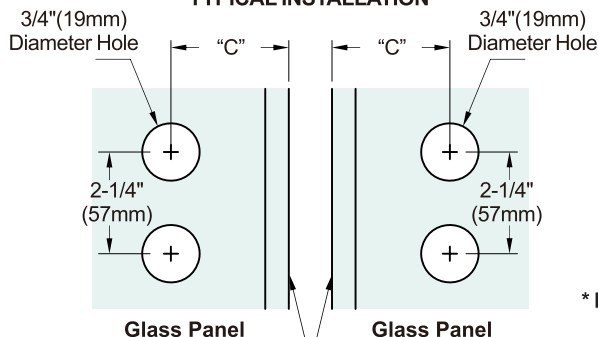

Glass Thickness	"C" Measurement
3/8"(10mm)	1-3/4"(44mm)
1/2"(12mm)	1-7/8"(47mm)

* From the Outside Edge of Miter

Glass Clamps

Code NO. **GBR55WS**

Beveled Wall Mount Bracket

Outside Edge of Miter
Glass Cutout

Email: info@sg-storeline.com
www.sg-storeline.com

