



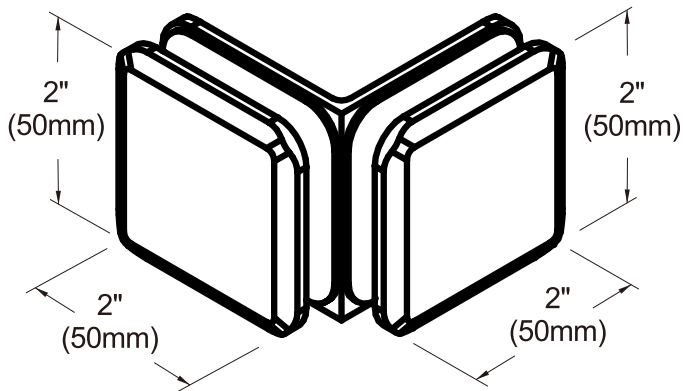

FRONT VIEW

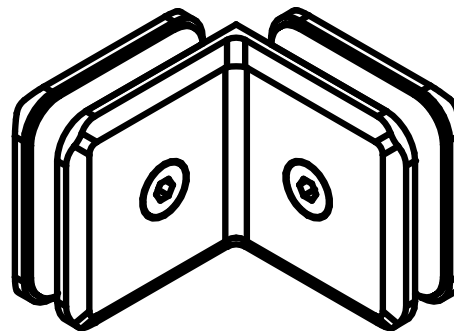

REAR VIEW

SPECIFICATIONS

Material: Solid brass

Glass Thickness Range: 3/8"(10mm) to 1/2"(12mm)

Hole Size Required: 3/4"(19mm)



Includes: Mounting screws and gaskets

Glass Clamps


Code NO. **BUC90G**

Glass to Glass 90 Degree Clamp
with Beveled Profile


TYPICAL INSTALLATION

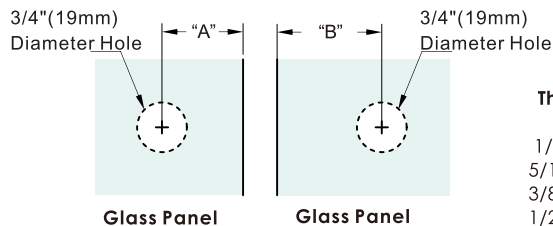

Glass Thickness	"A" Measurement	"B" Measurement
1/4"(6mm)	15/16"(24mm)	1-1/4"(32mm)
5/16"(8mm)	15/16"(24mm)	1-5/16"(34mm)
3/8"(10mm)	15/16"(24mm)	1-3/8"(35mm)
1/2"(12mm)	15/16"(24mm)	1-1/2"(38mm)



TEMPLATE OPTION 45° MITERED GLASS TYPICAL INSTALLATION

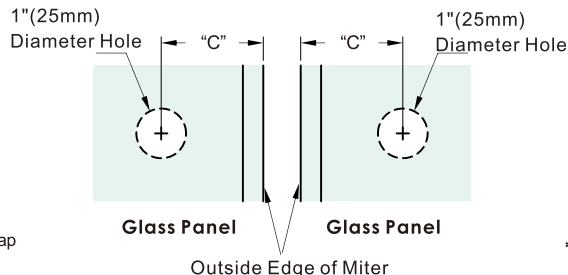

Glass Thickness	"C" Measurement
1/4"(6mm)	1-3/16"(30mm)
5/16"(8mm)	1-1/4"(32mm)
3/8"(10mm)	1-5/16"(34mm)
1/2"(12mm)	1-7/16"(37mm)

* From the Outside Edge of Miter

Glass Clamps

Code NO. **BUC90G**

Glass to Glass 90 Degree Clamp
with Beveled Profile

Email: info@sg-storeline.com
www.sg-storeline.com

